

EverLED-VE[™]

Direct Drop-In Fluorescent Tube Replacement

INFO SHEET Page 1 of 2

LEDdynamics EverLED-VE

Product Overview

Introducing the EverLED-VE[™], the newest member of our family of 4 foot retrofit products. It was developed from our EverLED-TR[™], the first commercially available LED T8 fluorescent tube replacement. The EverLED-VE[™]utilizes the same clean, safe, and long-lasting LED technology, but is available at a lower price point.

Five Year Warranty

Easy to install

Instantly make the transition to LED lighting technology. The EverLED-VE[™] is a direct, "drop-in" replacement for standard fluorescent light tubes. The EverLED-VE's innovative patent-pending driver technology is compatible with virtually all standard fluorescent ballasts, eliminating the need for costly replacement or modification of existing fixtures.

Upgrading your failure-prone, environmentally hazardous fluorescent lighting system to solid state, LED technology is now as easy as replacing the bulb!



Easy conversion to LED Lighting

- Works with existing magnetic and electronic ballasts
- Works with emergency backup ballasts
- ➤ Works with bi-level switching/tandem wiring

Environmentally Friendly

- Contains no toxic lead, mercury, or phosphors
- ➤ No glass
- ➤ Recyclable

Saves Money

- ≥ 10 year life expectancy
- Significantly lowers maintenance and energy costs
- ➤ No hazardous material disposal costs

High Quality & Performance

- No burn out failure
- No flicker or stroboscopic effect
- ≥ Instant on
- ➤ Dimmable
- ➤ Works well in cold temperatures down to -40°C
- No reflector light loss
- > 100% designed and manufactured in the USA
- ➤ High-performance LEDs
- No degrading UV

Specifications

- Light output/lumens typical 1900 lm
- Typical power, 20W
- Lumens per watt (efficacy) up to 94lm/W
- 5 year standard warranty
- Color Rendering Index (CRI) typical, 75 or 85
- → 3 standard color temperatures: 3000K, 4000K, and 5000K
- Other color temperatures available upon request
- ➤ Works in T8, T10, and T12 bi-pin applications







©2014 EverLED™, a division of LEDdynamics, Inc. www.EverLED.com . Specifications subject to change without notice. Patents Pending April, 2014 - Rev 2.5








EverLED-VE[™] **Direct Drop-In Fluorescent Tube Replacement INFO SHEET Page 2 of 2**

Typical Applications

- High use environments
- ► Hard to reach, high maintenance cost areas
- ➤ Commercial and industrial lighting
- Laboratories and research environments
- ► Hospitals and medical environments
- ➤ Museums and galleries
- ➤ Colleges and universities
- Office buildings
- ➤ Municipal buildings
- ► Hotels and hospitality suites
- ▶ Warehouses
- Parking garages
- Refrigerator and freezer cases
- Retail signs and displays

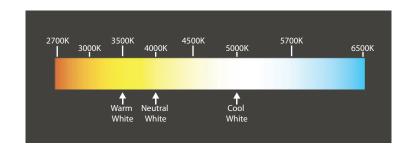

Part Number Identification

The part number system is explained below:

ET8A48BCC

Where:

Designates the EverLED product ID for an EverLED tube, T8 size Designates tube type (V for EverLED-VE) ET8

Α

Designates the tube length in inches 48

Designates CRI value (7=75 typ, 8=85 typ)

Designates color variant (30=3000K white, 40=4000K white, and 50=5000K white)

Specifications for EverLED-VE™

Model #	ET8V48830	ET8V48840	ET8V48750
Watt Rating (typical)	20W	20W	20W
Lumens (Initial)	1900	1900	1900
Color Rendering Index	85	85	75
Color Temperature	3000K	4000K	5000K
Life	0% failure to rated life	0% failure to rated life	0% failure to rated life
12 hours Per start	Ten years	Ten years	Ten years
3 hours Per start	Ten years	Ten years	Ten years
Light Output at 0°C	20% increase	20% increase	20% increase

©2013 EverLED™, a division of LEDdynamics, Inc. www.EverLED.com. Specifications subject to change without notice. Patents Pending Sep, 2013 - Rev 2.5

